2-5000-15 Section E Page 1

# **Randolph-Bundy Pre-hung Steel and Fiberglass Doors**

### **ROUGH OPENING DIMENSIONS**

			EL, & BUILDER'S GRAD g Dimensions – Swing		
		Wood F	rame Unit	Door w/14	' Sidelight*
DOOR SIZE	OPENING TYPE	WIDTH	HEIGHT	SINGLE	DOUBLE
Single Door	Rough Opening	2'8¼"	6′10″	3′11¾″	5′3¼"
2'6" x 6'8"	Brick Dimension**	2'10"	6′10¾″	4'1½"	5′5″
Single Door	Rough Opening	2'10¼"	6'10"	4'1¾"	5′5¼"
2'8" x 6'8"	Brick Dimension**	3'0"	6′10¾″	4'3½"	5′7″
Single Door	Rough Opening	3'2¼"	6'10"	4′5¾″	5'9¼"
3'0" x 6'8"	Brick Dimension**	3'4"	6′10¾″	4′7½″	5'11"
Single Door	Rough Opening	3'8¼"	6'10"	4'11¾"	6'3¼"
3'6" x 6'8"	Brick Dimension**	3'10"	6'10¾"	5′1½″	6'5"
Double Door	Rough Opening	5′2¾″	6'10"	6'6¼"	7'9¾"
5'0" x 6'8"	Brick Dimension**	5′4½"	6′10¾″	6′ 8"	7′11½"
Double Door	Rough Opening	5′6¾″	6'10"	6'10¼"	8'1¾"
5′4″ x 6′8″	Brick Dimension**	5′8½"	6′10¾″	7′ 0"	8'3½"
Double Door	Rough Opening	6'2¾"	6'10"	7'6¼"	8'9¾"
6'0" x 6'8"	Brick Dimension**	6′4½"	6′10¾″	7'8"	8′11½″
Cidalialia Dal	Rough Opening	N/A	6'10"	1'4¼"	N/A
Sidelight Only	Brick Dimension**	N/A	6′10¾″	1'6"	N/A

	8'0" HEIGHT FIBERGLASS & HD STEEL DOORS								
	New Constr	uction Rough Openin	g Dimensions – Swing	In Doors					
Wood Frame Unit Door w/14" Sidelight*									
DOOR SIZE	OPENING TYPE	WIDTH	HEIGHT	SINGLE	DOUBLE				
Single Door	Rough Opening	2′10¼″	8'2"	4'1¾"	5′5¼"				
2'8" x 8'0"	Brick Dimension**	3′0″	8'2¾"	4'3½"	5′7″				
Single Door	Rough Opening	3'2¼"	8'2"	4'5¾"	5'9¼"				
3'0" x 8'0"	Brick Dimension**	3'4"	8'2¾"	4'7½"	5'11"				
Double Door	Rough Opening	5'6¾"	8'2"	6'10¼"	5'6¾"				
5'4" x 8'0"	Brick Dimension**	5′8½"	8'2¾"	7′0″	5'8½"				
Double Door	Rough Opening	6'2¾"	8'2"	7'6¼"	8'9¾"				
6′0″ x 8′0″	Brick Dimension**	6'4½"	8'2¾"	7′8″	8′11½"				
Cidaliaht Only	Rough Opening	N/A	8'2"	1'4¼"	N/A				
Sidelight Only	Brick Dimension**	N/A	8'2¾"	1′6″	N/A				

<sup>\*</sup>If using 12" sidelights, subtract 2" from the opening width for a single sidelight, and 4" for double sidelights.

<sup>6&#</sup>x27;6" units subtract 2" from height, 7'0" units add 4" to height and for outswing doors (with bumper sills) subtract 5/8" from overall height of opening.



Effective 08/15/16 Cancels 10/15/14


<sup>\*\*</sup>Brick dimension is measured from outside edge of brick mould on door unit.




### **Architectural Collection**

JELD-WEN's Architectural Collection utilizes an exclusive technology to create the most realistic woodgrain appearance in the industry. Starting with a hand-crafted wood door where each piece of wood is carefully selected, an exact replica of that door is created. Every unique and intricate characteristic from the original wood door is transferred to the final product. Like real wood, the grain is captured in the surface and not above it . . . so real you won't be able to tell the difference.







AW-40
Walnut 4-Panel Bottom Arch

#### **Door Units:**

STANDARD:	AM-24	AW-40
3'0" x 6'8"	1484.12	1484.12
BUULNG.		
BIHUNG:		
6′0″ x 6′8″	2974.34	2974.34



Fire Door Option Available



- •All doors shown are panels only, pre-hung in 4-9/16" primed jambs with brick molding and aluminum thermal break adjustable sill.
- •Appropriate lights are designated & priced as installed in the RSL Clear and Decorative Doorglass section on pages EE 1-15.
- •Add all other desired modifications from page E7 for your total price






# **Design-Pro Fiberglass Units**

Design-Pro fiberglass doors feature the beautiful appearance of Mahogany, Oak or Fir woodgrains. Engineered for energy-efficiency and low-maintenance.

Design-Pro doors readily accept stain for a beautiful and long-lasting finish.

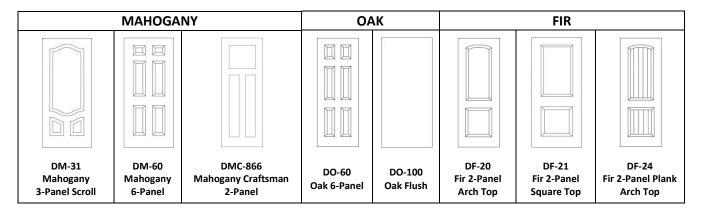

#### **Door Units:**

STANDARD:	DM-3:	1 DM-60	DM	C-866	D	<b>D-60</b>	DO-100	DF-20	DF-21	DF-24
3′0″ x 6′8″	678.02	660.66	69	5.90	52	22.44	522.42	486.80	486.80	486.80
BIHUNG:										
6′0″ x 6′8″	1362.14	4 1327.42	139	97.90	10	50.98	1050.94	979.70	979.70	979.70
Full View Sideligh	ts:	DM-690	n	DO-6	90	DI	-690			
		Mahoga		Oal			Fir			
12" x 6'8"		560.84		491.3			21.80			
Mahogany Crafts		elf (stock) an Shelf*	193.1 193.1							
* Special Order  Fire Door Options Available	Impact Ratir Available	0				<u>-</u>	∐ Mahogany Cra	☐ ☐ ☐ aft Shelf		
	,								Full Viev	v Sidelight

- •All doors shown are panels only, pre-hung in 4-9/16" primed jambs with brick molding and aluminum thermal break adjustable sill.
- •Appropriate lights are designated & priced as installed in the RSL Clear and Decorative Doorglass section on pages EE 1-15.
- •Add all other desired modifications from page E6 for your total price.



Effective 02/01/17 Cancels 02/01/15



# **Smooth-Pro Fiberglass Units**

The JELD-WEN Smooth-Pro line offers a complete selection of affordable fiberglass designs and contemporary styles. Smooth-Pro doors provide the look of traditional painted wood doors with the added benefits of energy efficiency and a no-dent, low-maintenance surface.



#### **Door Units:**

Joor Offics.								
STANDARD:	SP-20	SP-21	SP-24	SP-27	SP-30	SP-40	SP-40BT	SP-60
2'0" x 6'8"	_	_	_	_	_	_	_	_
2'6" x 6'8"	_	_	_	_	_	_	_	415.68
2'8" x 6'8"	Special	Special	Special	Special	Special	Special	432.38	415.84
2'10" x 6'8"	Special	434.64						
3'0" x 6'8"	452.04	452.04	452.04	452.04	452.04	434.64	418.10	418.10
BIHUNG: 4'0" x 6'8"	T -	_	_	_	_	_	_	<u> </u>
5'0" x 6'8"	_	_	_	_	_	_	871.76	838.36
5'4" x 6'8"	Special	Special	Special	Special	Special	Special	871.76	838.68
6'0" x 6'8"	910.18	910.18	910.18	910.18	910.18	875.38	842.30	842.30



Fire Door Options Available



- •All doors shown are panels only, pre-hung in 4-9/16" primed jambs with brick molding and aluminum thermal break adjustable sill.
- •Appropriate lights are designated & priced as installed in the RSL Clear and Decorative Doorglass section on pages EE 1-15.
- •Add all other desired modifications from page E6 for your total price.




Effective 02/01/17 Cancels 02/01/15



### **Smooth-Pro Fiberglass Units**

The JELD-WEN Smooth-Pro line offers a complete selection of affordable fiberglass designs and contemporary styles. Smooth-Pro doors provide the look of traditional painted wood doors with the added benefits of energy efficiency and a no-dent, low-maintenance surface.

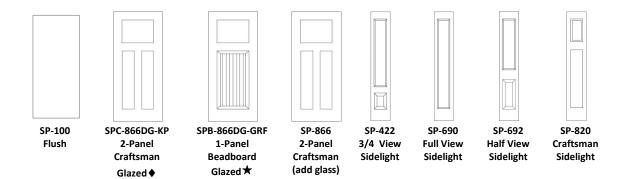

#### **Door Units:**

STANDARD:	SP-100	SP-866DG-KP♦	SPB-866DG-GRF★	SP-866 (add glass)	
2'0" x 6'8"	414.74	_	1	1	
2'6" x 6'8"	415.68	_	_	ı	
2'8" x 6'8"	415.84	Special	Special	Special	
2'10" x 6'8"	434.64	Special	Special	Special	
3'0" x 6'8"	418.10	1345.14♦	1380.90★	453.36	

#### BIHUNG:

4'0" x 6'8"	837.48	ı	ı	ı
5'0" x 6'8"	838.36	ı	ı	ı
5'4" x 6'8"	838.68	Special	Special	Special
5'8" x 6'8"	875.38	Special	Special	Special
6'0" x 6'8"	842.30	2696.38♦	2767.90★	912.82

◆ Unit complete with Direct Glaze Oak Park glass. ★Unit complete with Direct Glaze Greenfield glass.

#### **Boxed Sidelight Units:**

Add Glass

	SP-422	SP-690	SP-692	SPC-820
12" x 6'8"	319.62	319.62	319.62	319.62
14" x 6'8"	319.62	319.62	319.62	319.62





Fire Door Options Available



- •All doors shown are panels only, pre-hung in 4-9/16" primed jambs with brick molding and aluminum thermal break adjustable sill.
- •Appropriate lights are designated & priced as installed in the RSL Clear and Decorative Doorglass section on pages EE 1-15.
- •Add all other desired modifications from page E6 for your total price.




Effective 02/01/17 Cancels 02/01/15



### **Contour Steel Units**

These premium doors feature tough, galvanized steel facing with baked-on enamel primer and feature our high definition sticking and double-hip panel profile. Other panel profiles are available in selected designs. They're available with an optional steel edge that delivers added security and a fire rating of up to 90 minutes.

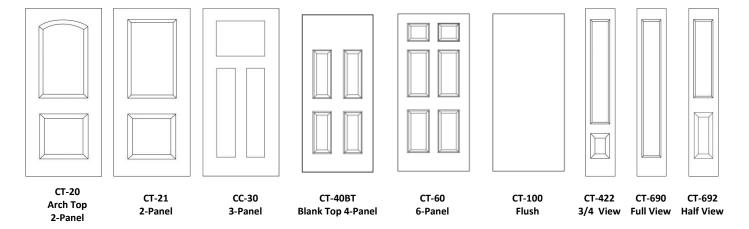

#### **Door Units:**

	CT-20	CT-21	CC-30	CT-40BT	CT-100	CT-60
STANDARD:	Wood Edge					
2'0" x 6'8"	_	_	_	_	340.28	_
2'6" x 6'8"	_	_	_	_	341.22	341.52
2'8" x 6'8"	391.40	391.40	391.40	358.22	341.38	341.68
3'0" x 6'8"	_	_			343.64	351.38
3'6" x 6'8"	_	_	_	_	485.30	_
3'0" x 7'0"	_	_	_	_	471.54	471.58
BIHUNG:						
4'0" x 6'8"	_	_	_	_	688.56	_
5'0" x 6'8"	_	_	_	_	689.44	690.04
5′4″ x 6′8″	789.80	789.80	789.80	723.44	689.76	690.36
6'0" x 6'8"	_	_	811.06	708.86	701.10	708.86

#### **Boxed Sidelight Units:**

Add Glass

	CT-422 Wood Edge	CT-690 Wood Edge	CT-692 Wood Edge	
12" x 6'8"	256.66	256.66	256.66	
14" x 6'8"	256.66	256.66	256.66	





Available



- •All doors shown are panels only, pre-hung in 4-9/16" primed jambs with brick molding and aluminum thermal break adjustable sill.
- •Appropriate lights are designated & priced as installed in the RSL Clear and Decorative Doorglass section on pages EE 1-15.
- •Add all other desired modifications from page E7 for your total price.



Effective 02/01/17 Cancels 02/01/15

2-5000-15 Section E Page 7

# 6'8" Options

# Options apply to units priced on pages E2 – E5 and E1a – E4a BASE PRICE INCLUDES 4-9/16" WOOD JAMB, WOOD BRICK MOLDING, MILL FINISH PERFORMANCE ADJUSTABLE SILL, ZINC CHROMATE HINGES, AND SINGLE BORE

### **ADDERS TO BASE PRICE:**

INSWING JAMBS	Single	Single w/1 Sidelight	Single w/2 Sidelights	Double	
4-9/16" Jamb Width	Base Price	Base Price	Base Price	Base Price	
5-1/4" Jamb Width	37.30	64.80	92.30	57.20	
6-9/16" Jamb Width	47.60	92.40	137.20	74.00	
9" Jamb Width	124.90	228.20	331.50	161.20	
14" Jamb Width	128.00	235.20	294.30	177.30	
Non-Standard Jamb Width		Call for pricing			
Fixed Thermal Sill – deduct	-15.40	-15.40	-15.40	-32.60	

OUTSWING JAMBS - FIXED SILL. SLOPE. OR BUMPER	Single	Single w/1 Sidelight	Single w/2 Sidelights	Double
4-9/16" Jamb Width	7.70	7.70	7.70	28.00

PERFORMANCE	E JAMBS with Brick Molding*	Single	Double	Single w/1 Sidelight	Single w/2 Sidelights
	4-9/16" DuraFrame	17.10	17.70	55.40	51.20
	6-9/16" DuraFrame	55.90	72.20	113.60	344.30
Inswing	4-9/16" Woodgrain Composite	182.00	316.40	409.00	586.70
	6-9/16" Woodgrain Composite	268.30	429.40	495.30	723.40
	4-9/16" DuraTech	99.10	115.90	173.30	248.60
	6-9/16" DuraTech	159.10	197.60	289.90	421.80
Outswing Add		7.70	7.70	7.70	28.00

OPTIONS	Single	Single w/1 Sidelight	Single w/2 Sidelights	Double
Brick Molding – Deduct and Add as Required				
Prime (no brick)	-31.00	-36.10	-36.10	-36.10
DuraFrame (brick)	4.10	5.40	5.40	5.40
DuraTech (brick)	35.30	45.00	45.00	45.00
PVC (brick)	.90	1.50	1.50	1.50
ADA SIII	8.70	N/A	N/A	-7.60
Spring Hinges (standard: zinc chromate, 2 per door)	21.50	21.50	21.50	43.00

DOOR PREP	
Deadbolt bore (standard: 5-1/2" up from center of lock bore with 2-1/8" face bore)	8.00
Peep sight bore (standard: 59" from bottom of door on center line with 1/2" bore)	8.00
Mail slot cut out (standard: 11-1/2" x 2-11/16")	16.00
Door light cut out	11.20

Transoms	Page A5
<b>Multipoint Locks</b>	Page A6
Sill Pans	Page A8

Standard Primed – 10 year warranty – Must Be Painted DuraFrame – Lifetime Warranty – Must Be Painted

DuraTech – Lifetime Warranty – Prefinished (white satin finish may be painted)



<sup>\*</sup>Performance Jambs:

# **Stain Kits**

### Architectural and Design-Pro Fiberglass Door Stain Kit



JELD-WEN Fiberglass Door Stain Kits are easy to use. The stain and top coat provide lasting beauty and increased protection to your door. The Stain Kit comes with everything required to stain and finish one fiberglass door and two sidelights or one double door unit. Visit the Jeld-Wen website for color selection at jeld-wen.com.

Available Color Selection: Dark Mahogany, Chestnut, Mocha, Moorish Teak, Teak Natural......List Price: \$173.76



2-5000-15 Section E Page 9

### **Fire Rated Steel Units**

**SDU** 





Fast-Frame's advanced design adds a new dimension of flexibility and durability. Timely® FAST-FRAME™ features a full 1" of adjustability to accommodate almost any variation in wall construction. This easy-to-install, user-friendly, kerfed steel door frame system is applicable to a full range of residential and commercial applications — wood or steel stud construction. Timely's expertise in innovating and manufacturing steel door frame components is second to none. FAST-FRAME™ is engineered to meet the most stringent code requirements including structural, impact and 90-minute fire ratings

### **Fire Rated Door Units**

- Specify inswing or ADA sill
- 2 spring hinges per door included
- Double doors include z-astragal
- A. Choose door size and panel style
- B. Add proper size outer adjustable closure span (includes sill)

	Α			В		
	90 Minute LK-1 6-Panel	90 Minute LD-1 Flush	20 Minute K-1 6-Panel	4-1/2" to 5-1/2"	5-1/2" to 6-1/2"	6-1/2" to 7-1/2"
2′8″ x 6′8″	450.30	450.50	404.60	67.00	80.30	117.00
3'0" x 6'8"	457.30	457.30	411.60	67.00	80.30	117.00
3′0″ x 7′0″	•	•	508.70	87.90	•	•
5′0″ x 6′8″	•	•	761.00	125.00	•	•
6'0" x 6'8"	868.40	866.90	775.20	125.00	•	•

◆ Available by special order, in addition to closure spans up to 10-1/2"

### **Optional**

Deadbolt bore	5-1/2" from center of lock bore with 2-1/8" face bore	8.00
Warnock-Hersey label*	Allow for extended lead time	4.00

<sup>\*</sup>standard doors have a Jeld-Wen 20 minute affidavit label at no additional charge

Fast-Frame can be used with any Jeld-Wen entry door, as well as any 1-3/4" wood door sized to Jeld-Wen dimensions. Jambs 4-1/2" to 10-1/2" wide. Please call for pricing on these options.



Effective 02/01/15 Cancels 07/14/14

# **HD Steel Retrofit Patio Doors**


SDU

### **Standard Features:**

- 4-9/16" primed wood frame with brick molding
- Double lock bore
- High-dam threshold and quality door bottom
- Choice of insulated glass insert (for other selections see section EE)







Unit With:	Center Hinge Inswing LH/RH	French Inswing LH/RH
1 Light IG	1273.50	1213.80
15 Light IG	1276.82	1217.12
15 Light GBG IG	1339.10	1279.40
Lift & Tilt Blinds IG	1619.78	1560.08
Screen door	add 136.00	add 279.30
6-9/16" Jamb	add 66.00	N/A

Center-Hinged Inswing								
				Rough O	pening Size			
Nominal D	oor Size	Actual Doo	r Unit Size	(wood stud)		Outside Brickmold Si		
Width	Height	Width	Height	Width	Height	Width	Height	
5′0″	6'8"	60-1/4"	79-1/2"	61"	80"	62-3/4"	80-3/4"	
6'0"	6'8"	72-1/4"	79-1/2"	73"	80"	74-3/4"	80-3/4"	

French Inswing								
Rough Opening								
Nominal D	oor Size	Actual Doo	r Unit Size	Size (wood stud)		Outside Brickmold Siz		
Width	Height	Width	Height	Width	Height	Width	Height	
5′0″	6'8"	59-1/4"	79-1/2"	60"	80"	61-3/4"	80-3/4"	
6'0"	6'8"	71-1/4"	79-1/2"	72"	80"	73-3/4"	80-3/4"	



# **New Construction Patio Doors**


# 4-9/16" PRIMED JAMB, COMPRESSION WEATHERSTRIP, MILL FINISH ADJUSTABLE SILL, W/WP-180, ZINC DICHROMATE HINGES, SINGLE BORE

### **Add Glass from Section EE**

Note: All designs are right hand active end swing or center swing.



Double Unit Open for inserts (2 inserts required)	HD Steel	Smooth Fiberglass	Textured Fiberglass
5′0″ x 6′8″	689.60	809.70	1023.80
5′4″ x 6′8″	689.60	809.70	1023.80
6'0" x 6'8"	703.10	809.70	1023.80



Triple Unit End Door Operates (3 inserts required)	HD Steel	Smooth Fiberglass	Textured Fiberglass
8′0″ x 6′8″	1050.30	1234.00	1551.70
9'0" x 6'8"	1071.50	1234.00	1551.70



Triple Unit Center Door Operates (3 inserts required)	HD Steel	Smooth Fiberglass	Textured Fiberglass
8'0" x 6'8"	1098.50	1280.70	1599.90
9′0″ x 6′8″	1119.80	1280.70	1599.90

Jamb Options	4-9/16"	6-9/16"
White DuraFrame for 5'0", 5'4", 6'0"	48.30	134.00
White DuraTech for 5'0", 5'4", 6'0"	187.20	284.80
Woodgrain PermaFrame for 5'0", 5'4", 6'0"	436.50	495.40
Primed for 5'0", 5'4", 6'0"	Standard	60.00
Primed for 7'6", 8'0", 9'0" center active	Standard	121.20

Screens for New Construction Hinged Patio Units				
2'6" White	31" x 78-7/8"	192.10		
2'8" White	33" x 78-7/8"	192.10		
3'0" White	37" x 78-7/8"	192.10		

