


Masonite. The Beautiful Door. ®
ROUGH OPENING DIMENSIONS

6'8" HIGH FIBERGLASS, STEEL HD, BUILDER'S GRADE DOORS					
New Construction Rough Opening Dimensions – Swing In Doors					
DOOR SIZE	OPENING TYPE	Wood Frame Unit		Door w/14" Sidelight*	
		WIDTH	HEIGHT	SINGLE	DOUBLE
Single Door 2'6" x 6'8"	Rough Opening Brick Dimension**	2'8 ¹ / ₄ "	6'10"	3'11 ³ / ₄ "	5'3 ¹ / ₄ "
		2'10"	6'10 ³ / ₄ "	4'1 ¹ / ₂ "	5'5"
Single Door 2'8" x 6'8"	Rough Opening Brick Dimension**	2'10 ¹ / ₄ "	6'10"	4'1 ³ / ₄ "	5'5 ¹ / ₄ "
		3'0"	6'10 ³ / ₄ "	4'3 ¹ / ₂ "	5'7"
Single Door 3'0" x 6'8"	Rough Opening Brick Dimension**	3'2 ¹ / ₄ "	6'10"	4'5 ³ / ₄ "	5'9 ¹ / ₄ "
		3'4"	6'10 ³ / ₄ "	4'7 ¹ / ₂ "	5'11"
Single Door 3'6" x 6'8"	Rough Opening Brick Dimension**	3'8 ¹ / ₄ "	6'10"	4'11 ³ / ₄ "	6'3 ¹ / ₄ "
		3'10"	6'10 ³ / ₄ "	5'1 ¹ / ₂ "	6'5"
Double Door 5'0" x 6'8"	Rough Opening Brick Dimension**	5'2 ³ / ₄ "	6'10"	6'6 ¹ / ₄ "	7'9 ³ / ₄ "
		5'4 ¹ / ₂ "	6'10 ³ / ₄ "	6' 8"	7'11 ¹ / ₂ "
Double Door 5'4" x 6'8"	Rough Opening Brick Dimension**	5'6 ³ / ₄ "	6'10"	6'10 ¹ / ₄ "	8'1 ¹ / ₄ "
		5'8 ¹ / ₂ "	6'10 ³ / ₄ "	7' 0"	8'3 ¹ / ₂ "
Double Door 6'0" x 6'8"	Rough Opening Brick Dimension**	6'2 ³ / ₄ "	6'10"	7'6 ¹ / ₄ "	8'9 ³ / ₄ "
		6'4 ¹ / ₂ "	6'10 ³ / ₄ "	7'8"	8'11 ¹ / ₂ "
Sidelight Only	Rough Opening Brick Dimension**	n/a	6'10"	1'4 ¹ / ₄ "	n/a
		n/a	6'10 ³ / ₄ "	1'6"	n/a

8'0" HIGH FIBERGLASS & STEEL HD DOORS					
New Construction Rough Opening Dimensions – Swing In Doors					
DOOR SIZE	OPENING TYPE	Wood Frame Unit		Door w/14" Sidelight*	
		WIDTH	HEIGHT	SINGLE	DOUBLE
Single Door 2'6" x 8'0"	Rough Opening Brick Dimension**	2'10 ¹ / ₄ "	8'2"	4'1 ³ / ₄ "	5'5 ¹ / ₄ "
		2'10"	8'2 ³ / ₄ "	4'3 ¹ / ₂ "	5'7"
Single Door 2'6" x 8'0"	Rough Opening Brick Dimension**	3'2 ¹ / ₄ "	8'2"	4'5 ³ / ₄ "	5'9 ¹ / ₄ "
		3'4"	8'2 ³ / ₄ "	4'7 ¹ / ₂ "	5'11"
Double Door 6'0" x 8'0"	Rough Opening Brick Dimension**	5'6 ³ / ₄ "	8'2"	6'10 ¹ / ₄ "	5'6 ³ / ₄ "
		5'8 ¹ / ₂ "	8'2 ³ / ₄ "	7'0"	5'8 ¹ / ₂ "
Double Door 6'0" x 8'0"	Rough Opening Brick Dimension**	6'2 ³ / ₄ "	8'2"	7'6 ¹ / ₄ "	8'9 ³ / ₄ "
		6'4 ¹ / ₂ "	8'2 ³ / ₄ "	7'8"	8'11 ¹ / ₂ "
Sidelight Only	Rough Opening Brick Dimension**	n/a	8'2"	1'4 ¹ / ₄ "	n/a
		n/a	8'2 ³ / ₄ "	1'6"	n/a

**If using 12" sidelights, subtract 2" from the opening width for a single sidelight, and 4" for double sidelights.

Brick dimension is measured from outside edge of brick mould on door unit.


6'6" units subtract 2" from height, 7'0" units add 4" to height and for swing-out doors (with bumper sills) subtract 7/8" from overall height of opening.



Effective 04/01/11

Cancels 09/01/08

Masonite Steel HD

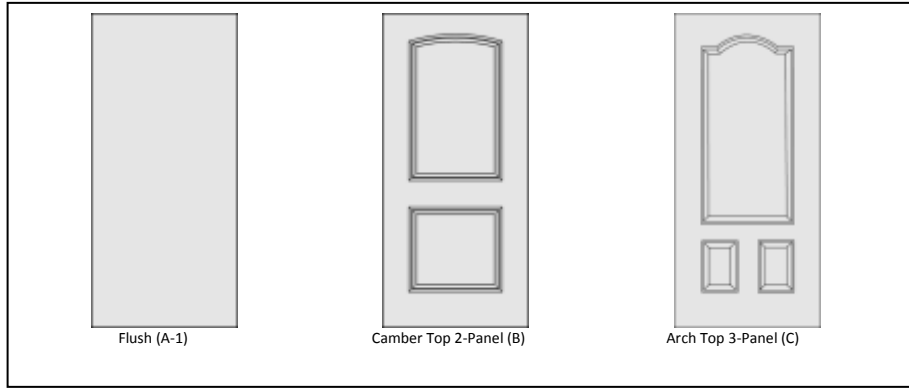

A-1

B

C

	Wood Edge	Steel Edge	Wood Edge	Steel Edge	Wood Edge	Steel Edge
2-0 x 6-8	329.30	422.55*	N/A	N/A	N/A	N/A
2-6	329.30	345.30	N/A	N/A	N/A	N/A
2-8	333.50	349.00	414.85*	428.10*	337.10	428.10*
2-10	416.95*	432.55*	497.80*	433.30*	420.55*	433.30*
3-0	339.70	355.30	497.80*	433.30*	343.30*	433.30*
3-6	500.80	605.60*	N/A	N/A	N/A	N/A
BIHUNGS (2 lights required)						
4-0 x 6-8	692.70	S/O	N/A	N/A	N/A	N/A
5-0	693.90	724.70	N/A	N/A	N/A	N/A
5-4	701.10	732.10	785.55*	820.20*	708.30	820.30*
6-0	708.90	739.90	793.35*	828.00*	716.10	828.00*

*non-stock item


All doors shown are panels only, prehung in 4-9/16" jambs, with brick mould and aluminum thermal break adjustable sill. Appropriate lights are designated on pages EE 1-15. For the lights installed, add the desired light from the RSL Decorative and Clear Doorglass section. Add all other desired modifications from page 7 for your total price.



Effective 04/01/11

Cancels 09/01/08

Masonite Steel HD

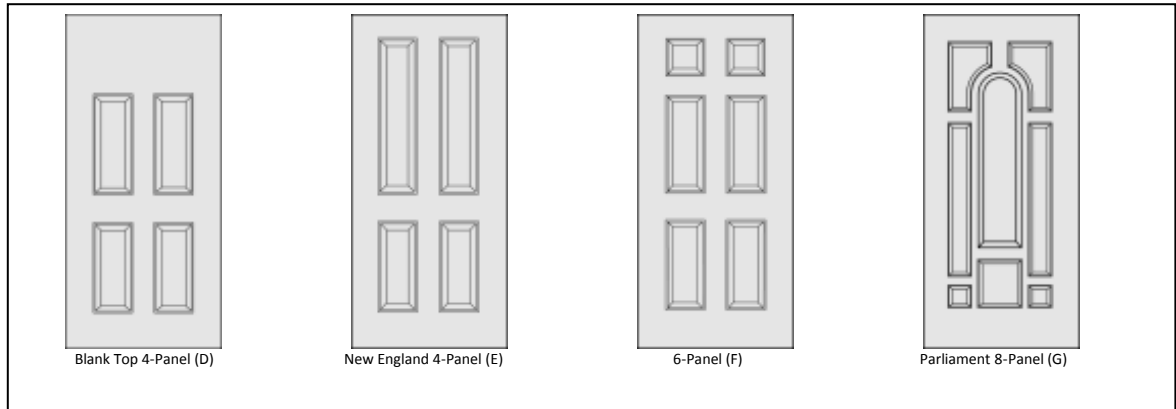

D

E

F

G

	Wood Edge	Steel Edge	Wood Edge	Steel Edge	Wood Edge	Steel Edge	Wood Edge	Steel Edge
2-6 x 6-8	414.40*	428.10*	N/A	N/A		379.80*	N/A	N/A
2-8	337.10	428.10*	337.10	428.10*	337.10	354.40	414.35*	431.65*
2-10	419.85*	433.30*	419.85*	433.30*	419.85*	433.30*	419.85*	433.30*
3-0	342.60	433.30*	342.60	433.30*	342.60	359.90	419.85*	433.30*
BIHUNGS (2 lights required)								
5-0 x 6-8	746.90*	819.60*	N/A	N/A	701.10	819.60*	N/A	N/A
5-4	708.30	819.60*	708.30	820.20*	708.30	742.90	785.55*	820.30*
6-0	716.10	828.00*	716.10	828.00*	716.10	750.70	793.35*	828.00*

*non-stock item


All doors shown are panels only, prehung in 4-9/16" jambs, with brick moulding and aluminum thermal break adjustable sill. Appropriate lights are designated on pages EE 1-15. For the lights installed, add the desired light from the RSL Decorative and Clear Doorglass section. Add all other desired modifications from page 7 for your total price.



Effective 04/01/11

Cancels 09/01/08

Masonite Steel HD

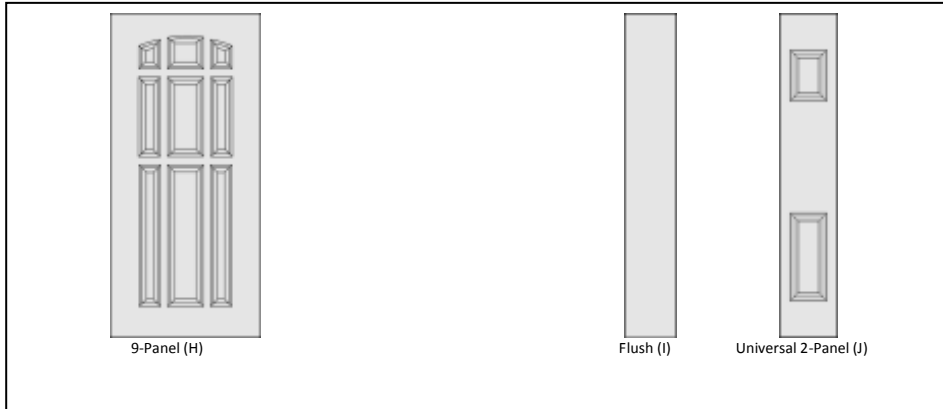

H

I

J

	Wood Edge	Steel Edge
2-6 x 6-8	N/A	N/A
2-8	414.40*	428.10*
2-10	419.90*	433.30*
3-0	419.90*	433.30*
5-0	N/A	N/A
5-4	785.60*	820.20*
6-0	793.40*	828.00*

Boxed Sidelight Units		
	Wood Edge	Wood Edge
10" x 6'-8"	S/O	S/O
12" x 6'-8"	248.20	248.20
14" x 6'-8"	248.20	248.20

*non-stock item

All doors shown are panels only, prehung in 4-9/16" jambs, with brick moulding and aluminum thermal break adjustable sill. Appropriate lights are designated on pages EE 1-15. For the lights installed, add the desired light from the RSL Decorative and Clear Doorglass section. Add all other desired modifications from page 7 for your total price.




Effective 04/01/11

Cancels 09/01/08

Belleville Smooth Fiberglass

4-9/16 JAMB WITH BRICK MOULDING AND ADJ. ALUMINUM THERMAL BREAK SILL

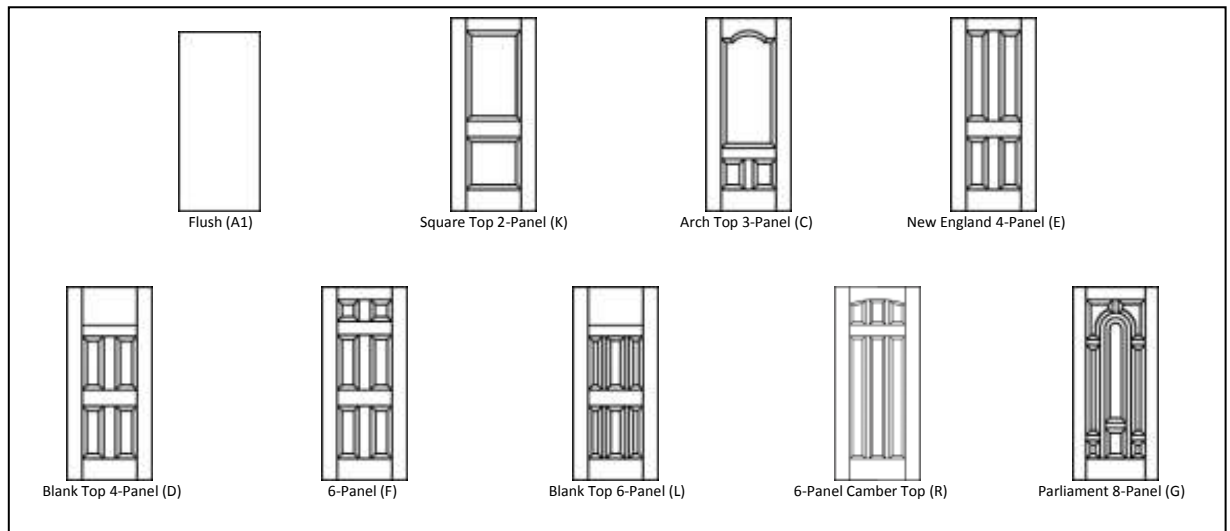

	A1	K	C	E	D	F	L	R	G
2-0 x 6-8	394.90	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
2-6 x 6-8	394.90	N/A	N/A	N/A	N/A	394.90	N/A	N/A	N/A
2-8	394.90	472.15*	472.15*	472.15*	394.90	394.90	472.15*	472.15*	N/A
2-10	472.15*	472.15*	472.15*	472.15*	472.15*	472.15*	472.15*	472.15*	472.15*
3-0	397.20	397.20	397.20	397.20	397.20	397.20	472.15*	472.15*	472.15*
BIHUNGS (2 lights required)									
4-0 x 6-8	848.80	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
5-0 x 6-8	848.80	N/A	N/A	N/A	N/A	848.80	N/A	N/A	N/A
5-4 x 6-8	848.80	926.05*	926.05*	926.05*	848.80	848.80	926.05*	926.05*	N/A
6-0 x 6-8	848.80	848.80	848.80	848.80	848.80	848.80	926.05*	926.05*	926.05*

*non-stock item

Boxed Sidelight Units		
	I	J
10" x 6'-8"	338.80*	N/A
12" x 6'-8"	300.20	300.20
14" x 6'-8"	300.20	300.20

*non-stock item

All doors shown are panels only, prehung in 4-9/16" jamba, with brick moulding and aluminum thermal break adjustable sill. Appropriate lights are designated on pages EE 1-15. For the lights installed, add the desired light from the RSL Decorative and Clear Doorglass section. Add all other desired modifications from page 7 for your total price.




Effective 04/01/11

Cancels 09/01/08

Oakcraft Textured Fiberglass

4-9/16 JAMB WITH BRICK MOULDING AND ADJ. ALUMINUM THERMAL BREAK SILL

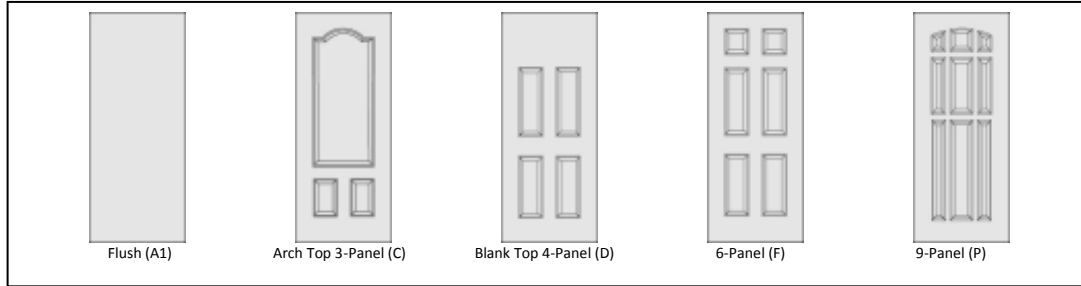

	A1	C	D	F	P
2-0 x 6-8	S/O	N/A	N/A	N/A	N/A
2-6 x 6-8	469.00	N/A	N/A	469.00	N/A
2-8	469.00	546.20*	546.20*	469.00	S/O
2-10	548.10*	548.10*	548.10*	548.10*	548.10*
3-0	471.30	471.30	471.30	471.30	471.30
BIHUNGS (2 lights required)					
4-0 x 6-8	S/O	N/A	N/A	N/A	N/A
5-0 x 6-8	1051.30	N/A	N/A	1051.30	N/A
5-4 x 6-8	1051.30	1204.90*	1204.90*	1051.30	1204.90*
6-0 x 6-8	1051.30	1051.30	1051.30	1051.30	1051.30

*non-stock item

Boxed Sidelight Units			
	I	M	Q
10" x 6'-8"	393.50*	N/A	N/A
12" x 6'-8"	354.90	354.90	354.90
14" x 6'-8"	354.90	354.90	354.90

*non-stock item

All doors shown are panels only, prehung in 4-9/16" jamba, with brick moulding and aluminum thermal break adjustable sill. Appropriate lights are designated on pages EE 1-15. For the lights installed, add the desired light from the RSL Decorative and Clear Doorglass section. Add all other desired modifications from page 7 for your total price.



Effective 04/01/11

Cancels 09/01/08

6'8" Options

BASE PRICE INCLUDES 4-9/16" WOOD JAMB, WOOD BRICK MOULDING, MILL FINISH PERFORMANCE ADJUSTABLE SILL, ZINC CHROMATE HINGES, AND SINGLE BORE

INSWING	Single	Single w/1 Sidelight	Single w/2 Sidelights	Double
5-1/4" Jamb Width	36.60	63.80	91.00	51.80
6 9/16" Jamb Width	44.10	110.60	177.10	62.00
9" Jamb Width	114.90	248.80	370.70	150.10
14" Jamb Width	174.60	320.60	466.60	219.80
Non-Standard Jamb Width	Go to next larger standard jamb width cost			
Fixed Thermal Sill – deduct	(15.30)	(15.30)	(15.30)	(32.40)

OUTSWING FIXED SILL, SLOPE OR BUMPER	Single	Single w/1 Sidelight	Single w/2 Sidelights	Double
4 9/16" Jamb Width	4.60	4.60	4.60	5.30
5-1/4" Jamb Width	45.80	73.00	100.20	71.80
6 9/16" Jamb Width	57.50	124.00	190.50	80.50

OPTIONS	Single	Single w/1 Sidelight	Single w/2 Sidelights	Double
A.D.A. Sill	5.10	N/A	N/A	8.00
Brick Moulding, none – deduct	(22.30)	(24.90)	(24.90)	(24.90)
Spring Hinges (standard: zinc chromate, 2 per door)	40.00	40.00	40.00	80.00
PVC Brick Moulding	13.00	23.40	23.40	23.40

STEEL DOOR, HEIGHT OPTIONS	Single	Single w/1 Sidelight	Single w/2 Sidelights	Double
6'6"	*CALL FOR QUOTE*			
7'0"	*CALL FOR QUOTE*			

UPGRADE TO PERFORMANCE JAMBS AND PERMA BRICK MOULDING			
Add to cost of door hung in 4-9/16" wood frame with wood brick moulding		White	Wood Grain
Singles	2'0" thru 3'0" 4-9/16"	92.40	111.30
Bihungs	4'0" thru 6'0" 4-9/16"	118.60	215.30
Singles	2'0" thru 3'0" 6-9/16"	149.70	167.90
Bihungs	4'0" thru 6'0" 6-9/16"	167.60	265.50

PREP OPTIONS	
Deadbolt bore (standard: 5-1/2" up from center of lock bore with 2-1/8" face bore)	8.00
Peep sight bore (standard: 59" from bottom of door on center line with 1/2" bore)	8.00
Mail slot cut out (standard: 11-1/2" x 2-11/16")	16.00
Door light cut out	11.20




Randolph-Bundy

Effective 04/01/11

Cancels 09/01/08

New Construction Hinged Patio Doors

4-9/16" PRIMED JAMB, COMPRESSION WEATHERSTRIP, MILL FINISH ADJUSTABLE SILL, ZINC DICHROMATE HINGES, SINGLE BORE

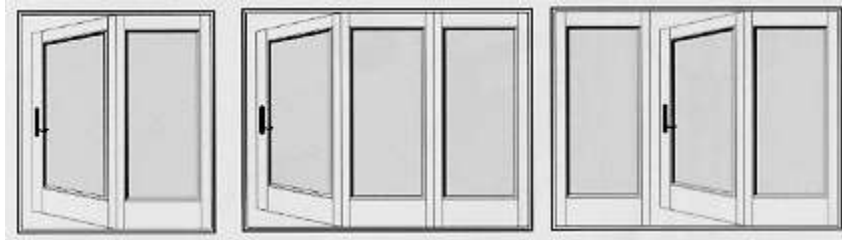

Doors Open for inserts (2 inserts required)	HD Steel	Smooth Fiberglass	Textured Fiberglass
5-0 x 6-8	741.40	864.80	1019.70
5-4 x 6-8	748.80	864.80	1019.70
6-0 x 6-8	756.30	864.80	1019.70

Triple Unit End Door Operates (3 inserts required)	HD Steel	Smooth Fiberglass	Textured Fiberglass
7-6 x 6-8	1086.50	1268.60	1506.40
8-0 x 6-8	1116.70	1301.40	1525.10
9-0 x 6-8	1130.00	1301.40	1525.10


Triple Unit Center Door Operates (3 inserts required)	HD Steel	Smooth Fiberglass	Textured Fiberglass
7-6 x 6-8	1138.10	1331.10	1554.90
8-0 x 6-8	1172.50	1357.20	1580.90
9-0 x 6-8	1185.80	1357.20	1580.90

Jamb Options	4-9/16"	6-9/16"
White Permaframe for 5-0, 5-4, 6-0	225.00	328.40
Wood grain Permaframe for 5-0, 5-4, 6-0	245.40	371.90
Primed for 5-0, 5-4, 6-0	Standard	68.70
Primed for 7-6, 8-0, 9-0 center active	Standard	99.40

Screens for New Construction Hinged Patio Units		
2-6 White	31" x 78-7/8"	195.90
2-8 White	33" x 78-7/8"	195.90
3-0 White	37" x 78-7/8"	197.20

Masonite Steel Builder's Grade 26GA

4-9/16" JAMB WITH BRICK MOULDING AND FIXED ALUMINUM THERMAL BREAK SILL

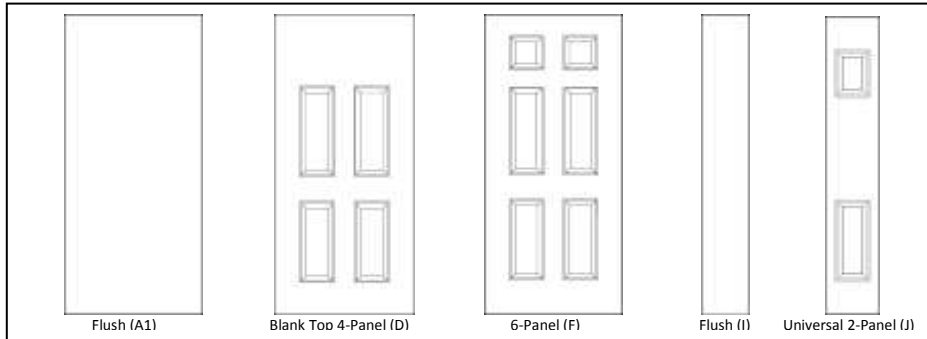

	A-1	D	F
2-0 x 6-8	*	N/A	N/A
2-6 x 6-8	*	*	*
2-8 x 6-8	289.10	292.80	292.80
2-10 x 6-8	S/O	S/O	S/O
3-0 x 6-8	295.80	299.50	299.50
BIHUNGS <small>(2 lights required)</small>			
4-0 x 6-8	*	N/A	N/A
5-0 X 6-8	*	*	*
5-4 X 6-8	593.40	600.80	600.80
6-0 X 6-8	601.40	608.80	608.80

Boxed Sidelight Units		
	I	J
10" x 6'8"	S/O	S/O
12" x 6'8"	248.20	242.70
14" x 6'8"	248.20	*

6-9/16" Jamb Adders	
Single Inswing	49.00
Single Outswing	63.00
Double Inswing	62.90
Double Outswing	96.10
Single w/1 Sidelight	115.50
Single w/2 Sidelights	181.80

* For selections in these sizes, see the Masonite Steel HD series (P. 2-4)

Adjustable Sill Adders	
2-8	10.80
3-0	11.50
5-4	24.20
6-0	24.20

4-9/16" Jamb Adders	
2-8 Outswing	12.20
3-0 Outswing	14.10
5-4 Outswing	32.40
6-0 Outswing	32.40

No Brick Moulding Deducts	
Single	(22.30)
Double	(24.90)

BUILDER GRADE HINGED PATIO DOOR 26 GA. STEEL

4-9/16" JAMB WITH BRICK MOULDING AND FIXED ALUMINUM THERMAL BREAK SILL

	15-LT	1-LT	GBG 13/16 (16-LT)
5-4 x 6-8	925.70	885.70	965.70
6-0 x 6-8	933.70	893.70	993.70
Screen w/ track (white)	2-8	3-0	
	195.90	197.20	




Effective 04/01/11

Cancels 09/01/08

90 Minute Fire-Rated Doors in Adjustable Frames

Introducing the Ultimate in Adjustable Steel Door Frames...



THE ULTIMATE ADJUSTABLE KERFED STEEL DOOR FRAME

FAST-FRAME'S advanced design adds a new dimension of flexibility and durability to Masonite's steel entry door line. Developed and manufactured exclusively for Masonite by Timely, FAST-FRAME™ features full 1" of adjustability to accommodate almost any variation in wall construction. This easy-to-install, user-friendly, kerfed steel door frame system is applicable to a full range of residential and commercial applications – wood or steel stud construction. Timely's expertise in innovating and manufacturing steel door frame components is second to none. FAST-FRAME is engineered to meet the most stringent code requirements including structural, impact and 90-minute fire ratings.

90 Minute Door Units

- Specify standard inswing or ADA sill
- Double doors include z-astragal

A. Choose door size and panel style

B. Add proper size outer adjustable closure span

	A		B			
	LK-1 6-Panel	LD-1 Flush	4-1/2" - 5-1/2"	5-1/2" - 6-1/2"	6-1/2" - 7-1/2"	7-1/2" - 8-1/2"
2-8 x 6-8	506.00	498.00	81.78	99.00	117.00	*
3-0 x 6-8	510.00	502.00	81.78	99.00	*	
3-0 x 7-0	552.00	544.00	103.00	*	*	*
5-0 x 6-8	*	754.98	116.07	*	*	*
6-0 x 6-8	777.98	769.98	116.07	*		

*sizes available by special order

Options

Deadbolt bore	5-1/2" from center of lock bore with 2-1/8" face bore	8.00
Spring hinges	Two spring hinges with one standard hinge	40.00



Effective 04/01/11

Cancels 09/01/08